


13-1518B

Ratings*

- Volts
 - 300 V
- Amps 30 A
- Breakdown voltage 4800 V
- Maximum rating shown; some options may be rated lower.

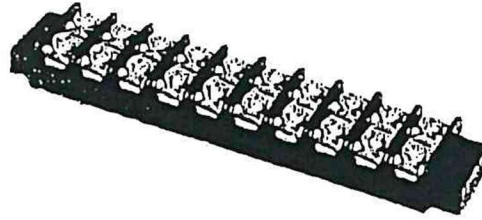

Agency information

- UL File E62622, CSA File 47235 and 15364; IEC Compliance, CE

Specifications


- Poles: 2–22
- Wire range: 12 - 22 AWG Cu
- Center spacing: 0.437" or 7/16" (11mm)
- Distance between barriers: 0.353" (9mm)
- Screw size: #6-32 phil-slot screws
- Torque rating: 9 lb-in
- Mounting: #6 screws
- Operating temperature: -40°C to 130°C (-40°F to 266°F)

Materials

- Molded black thermoplastic base UL rated 94V0
- Terminal plating: Tin-plated brass terminals
- Zinc-plated steel screws

VETCO Electronics
425-641-7275 X6

Dimensions — in

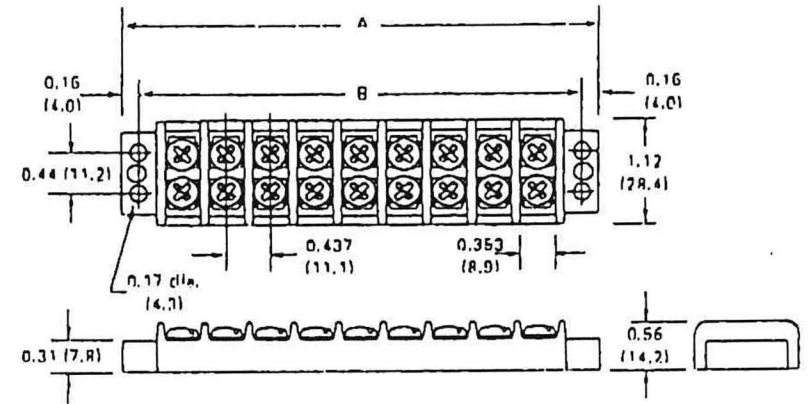

Poles	A	B	Poles	A	B	Poles	A	B
02	1.63	1.31	12	6.00	5.68	22	10.37	10.06
03	2.07	1.75	13	6.44	6.12			
04	2.51	2.18	14	6.87	6.56			
05	2.94	2.62	15	7.31	7.00			
06	3.38	3.06	16	7.75	7.43			
07	3.82	3.50	17	8.19	7.87			
08	4.25	3.93	18	8.62	8.31			
09	4.69	4.37	19	9.06	8.75			
10	5.13	4.81	20	9.50	9.18			
11	5.57	5.25	21	9.94	9.62			

1" = 25.4mm.